


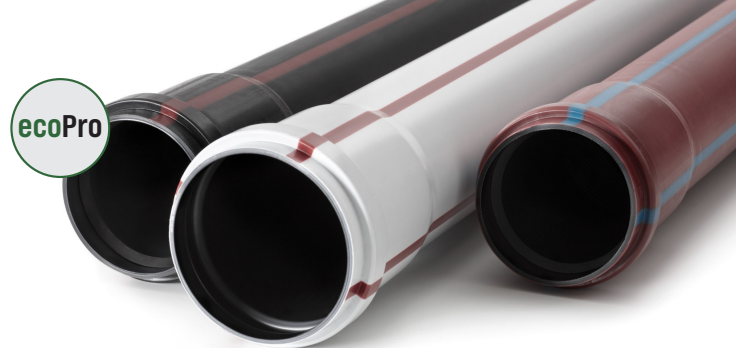

Cable conduit **ecoPro** made of PE-HD with plug-in sleeve

Core foamed acc. to DIN 16876

Standard design

Sleeve type	integrally moulded plug-in sleeve (SM)
Sealing ring	compression lip sealing ring, type „SX“ (insert in the factory)
sharp end	with plug-in depth marking and chamfer
Length	6 m
Colour	black
Inner surface	smooth

Possible designs

Length	1 m to 6 m
Coloured stripes	co extruded
Colour	on request
Outer surface	coloured, co extruded or solid-dyed
Labelling	acc. to customer specifications

Item designation	Outer diameter (mm)	Wall thickness (mm)	SDR types	Pallet contents (m)
KSR 110 x 4,2 SM SK	110	4,2	26	516
KSR 110 x 5,3 SM SK	110	5,3	21	516
KSR 110 x 6,3 SM SK	110	6,3	17,6	516
KSR 110 x 10,0 ASM* SK	110	10,0	11	516
KSR 125 x 3,9 SM SK	125	3,9	33	408
KSR 125 x 4,8 SM SK	125	4,8	26	408
KSR 125 x 7,1 ASM* SK	125	7,1	17,6	306

*ASM: attached plug-in sleeve